


WEIGHTLIFTER

WHERE QUALITY, HONESTY & SERVICE COME FIRST

Specification Sheet

BULK ALLOY TIPPER, POCKET HEADBOARD, STEP FRAME

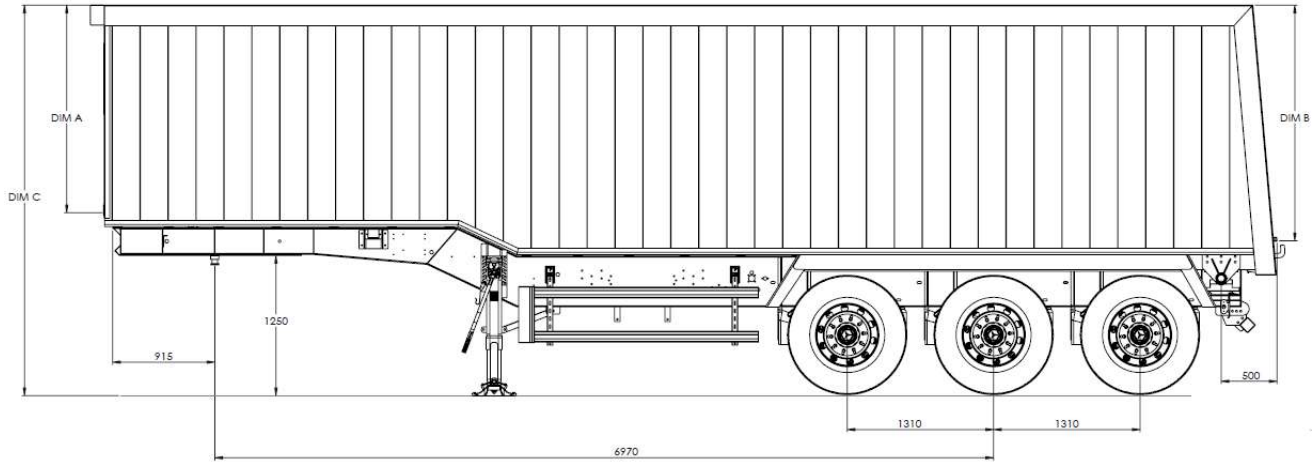

Capacity cu yds (m ³)	60 (45.9)	67 (51.2)	70 (53.5)	75 (57.3)	80 (61.2)	60 (45.9)	67 (51.2)	70 (53.5)	75 (57.3)	80 (61.2)
Top Rail	Normal	Normal	Normal	Normal	Normal	Reversed	Reversed	Reversed	Reversed	Reversed
A	1735	1960	2055	2215	2375	1640	1855	1945	2100	2250
B	1985	2210	2305	2465	2625	1890	2105	2195	2350	2500
C	3367	3592	3687	3847	4007	3272	3487	3577	3732	4127

Figures refer to a 10.1m frame with a body construction including an air operated, sloping taildoor.

Other dimensions: Total length 10522mm plus catwalk, Total width 2550mm, King Pin to rear 9607mm, Overall rear overhang 600mm
Plated weights: Gross train weight 39000kg, Axle weight 8000kg, King pin weight 15000kg

CHASSIS

Weightlifter Triaxle 10.1m Step Framed Tipping Trailer Chassis. Manufactured in steel. Fabricated I beam with 4 square section box crossmembers at rear. 2" kingpin, 915mm from front of frame. 1300mm chassis centres and 250mm ride height.

Optional

- 10.6m or 11.1m frame length

AXLES AND SUSPENSION

JOST DCA TE5/8T 1010 Axles with 22.5 Disc on JOST 9 tonne lightweight air suspension. Cartridge bearings.

Optional

- Raise and lower valve. (COLAS), auto reset.
- Lifting front or rear axle automatically raised and lowered by EBS unit.
- Lifting front or rear axle complete with traction aid operated from chassis/cab.
- BPW HSFALU 3/9010-15 HDV 36 SN4218 Drum Brake Axles on BPW 9 tonne tri-axle AL suspension with welded seats
- BPW SHBFALU 3/9010-15 HDV 36 TSB24309 22.5 Disc Brake Axles on BPW 9 tonne tri-axle AL suspension with welded seats
- SAF Intradisc IU25/2000 33 CD Axles with SBS2220 22.5 Disc brakes. SAF 9 tonne tri-axle intra suspension

- SAF Intradrum IU25/2000 33 CD Axles with SNK 420x180 Drum brakes. SAF 9 tonne tri-axle intra suspension.

BRAKING SYSTEM

Knorr-Bremse EBS & RSS (Roll Stability System) with auto-spring park brake. Steel air tanks

Optional


- Wabco EBS & RSS with auto-spring park brake.
- Alloy air tanks

WHEELS AND TYRES

Bridgestone 168 385/65R 22.5 tyres. Steel wheels factory painted Silver.

Optional

- Alcoa machine finish alloy wheels.
- Alcoa Durabrite finish alloy wheels.
- Xlite machine finished alloy wheels.
- XBrite high-lacquer alloy wheels.

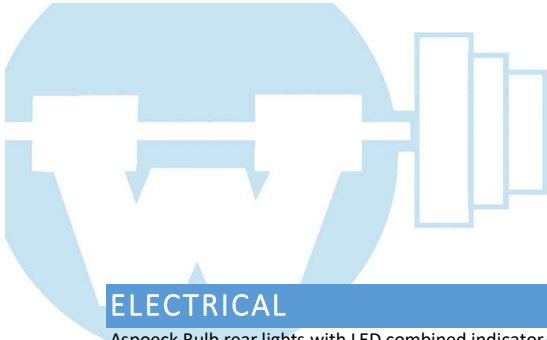

ELECTRICAL

Aspoeck Bulb rear lights with LED combined indicator/side marker lights.
Amber Tip Warning Light.

Optional

- Aspoeck LED strip rear lights with LED combined indicator/side marker lights.
- High intensity reverse/working lights/strobe lights.
- PM 1155 4 digital load cells complete with chassis or in-cab display.
- PM 511 FreeWeigh handheld display.
- PM 1300 4 digital load cells complete with cab display and reverse camera.
- VWS 4 digital load cell Weighing System, complete with chassis or cab display.
- VWS 4 digital load cell Weighing System, complete with cab display and reverse camera.
- Additional Camera.
- VWS Handheld Display.

TIPPING GEAR

Edbro CS18LE507033 OE eye mount ram assembly.

Optional

- Hyva FE 191 Eye mount ram assembly.

CHASSIS ANCILLARIES

Jost Modul B0201 geared landing legs with compensating feet.
Alloy side guards.

Weightlifter steel rear under-run.

Spray suppression to suit European Whole Vehicle Type Approval legislation.

Optional

- Chassis set up for air locking door switched on chassis side.
- Chassis set up for air locking door switched from in cab.
- Towing Eyes.
- Toolbox JBX65
- Toolbox JBX100.
- Reverse Buzzer.
- Lashing Rings.
- Internal LED Body Light switched on chassis.
- Fast-Fit plastic wings.

BODY

Weightlifter Hollow alloy interlocking plank sided tipper body. 67cu yd capacity.

Vertical Headboard with doghouse for ram. Outer sections pressed in 4.76mm alloy plate. Doghouse section pressed in 6mm alloy plate. Pressed top-rail. 12mm pressed lifting plate. Weightlifter cover plate, secured with anti-luce fasteners.

Floor constructed with 6.35 mm alloy plate with rearmost sheet in 8mm on 100mm x 100mm extruded alloy cross members and rubber blocks. 250mm x 75mm alloy stub channels. 10mm rear crossmember.

Sides constructed with 30mm x 250mm wide alloy interlocking planking section.

Normal top rails, body flush to inside so no impedance of product discharge. Vertical taildoor constructed using 4.76mm alloy plate with pressed framing. Outside fitting and rubber sealed. Externally hung at top from 150mm x 75mm alloy channel using x4 single action alloy hinges.

406mm (16") rack & pinion grain hatch, chute and sock complete with aluminium rain cover.

Secured at bottom with 25mm diameter high tensile steel locking bar with loop type handles and ramp fasteners to each side.

Optional

- Alternative capacities.
- Reversed top rails body flush to outside.
- Rearmost 5715mm (NTR) 6602mm (RTR) of floor in 6mm Endural ilo 8mm alloy.
- Internal wear plates to sides.
- Taildoor sloping forward 5°, secured at bottom with air actuated, internal or external 25mm diameter high tensile steel locking. (see chassis ancillaries)
- Additional ramp fasteners to bottom of taildoor.
- Name board on top half of taildoor.

ACCESS

Body mounted alloy viewing ladder

Gusseted tube type steps inside body to correspond with external access

Optional

- Body mounted full width catwalk with access step.
- Delete internal steps.
- Exterior prop with ladder to suit stored under body offside.

BODY ANCILLARIES

Headboard mounted shovel and storage rack

Conspicuity markings included.

SHEETER SYSTEMS

Optional

- Full range of Dawbarn side-to-side, flip and gull-wing sheeting systems.
- Weightlifter Bodies, Harsh and Shur-Co options also available.

PAINT

Gloss painted chassis in two pack.

Unpainted body.

One year paint warranty.

Optional

- Gloss painted body

Depending on trailer configuration, certain options may not be possible. For further information, please contact Weightlifter Bodies Ltd. Pictures and technical information are not binding and are subject to modification without prior notice.

Feb 2021 Issue 1.